




RIDECASE CARMOUNT

User's Guide



GB

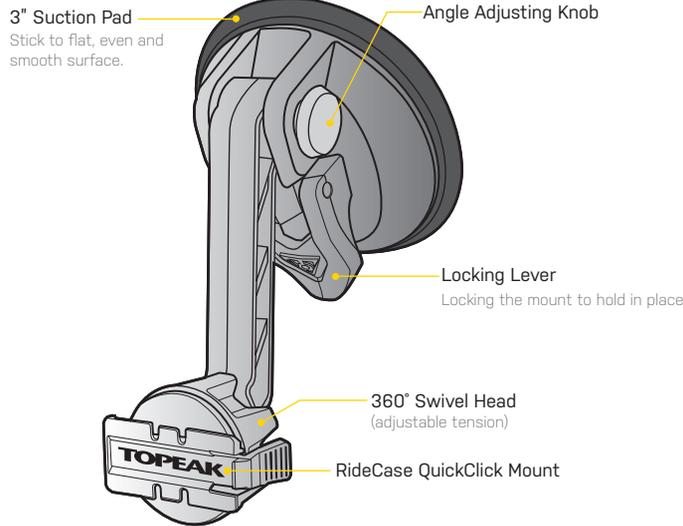

CAUTION

- For safety reasons, do not adjust angle, tension or set up RideCase CarMount while driving.
- Use in accordance with State and Local driving laws.
- Use RideCase CarMount only on flat, even and smooth surfaces. Do not use outdoors.
- Remove and re-mount RideCase CarMount every 3 months to maintain the elasticity of Suction Pad.

OPTIONAL ACCESSORIES




RideCase Series




SmartPhone DryBag Series


INSTALLATION

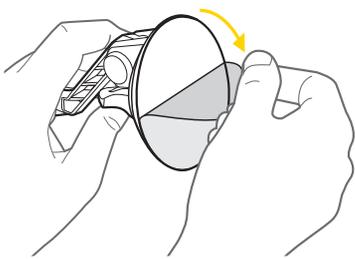


1. Clean the desired location then peel the protective skin from the suction pad.



2. Place the suction pad on a desired smooth surface.




3. Push the suction pad and pull down the lever to secure the mount.

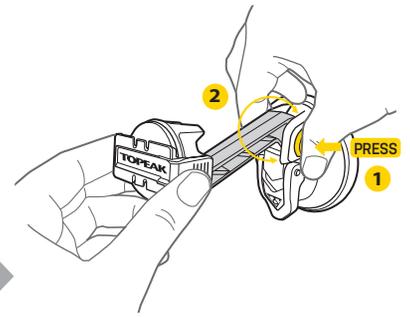


4. Press the angle adjusting knob to adjust the car mount vertical angle.


Top View

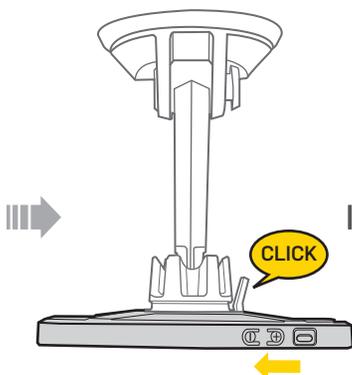


5. Install RideCase with smartphone onto RideCase QuickClick Mount.




6. Adjust your smartphone with Swivel Head in any angle you want.

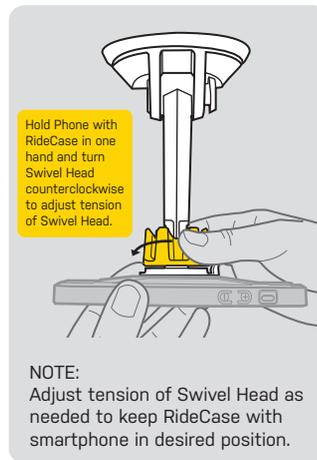

REMOVE RIDECASE WITH SMARTPHONE FROM CARMOUNT

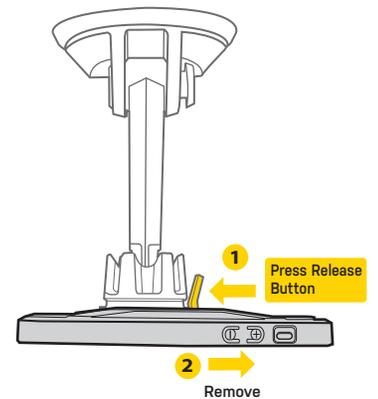

REMOVE RIDECASE CARMOUNT FROM SURFACE

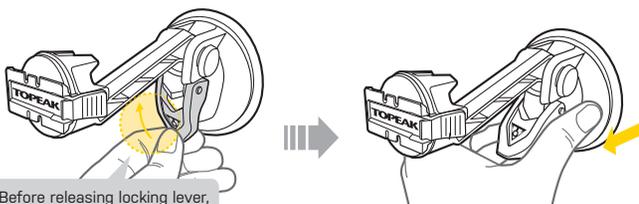

Before releasing locking lever, please check the space is enough to release CarMount from surface as shown.

WARRANTY

2-year Warranty: All mechanical components against manufacturer defects only.

Warranty Claim Requirements

To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this manual.

* The specifications and design are subject to change without notice.

Please contact your Topeak dealer with any questions.

For USA customer service call : 1-800-250-3068

www.topeak.com